EQUIPMENT SHOWCASE | TRANSFORMER SETUPS

WHERE HEAVY HAUL MEETS RELIABLE

PREPARED FOR VIRGINIA TRANSFORMER

Four setups we run for power transformers, each shown with a tall transformer of about 16 ft overall height, plus a labeled spec drawing.

01 19 AXLE TOWER

02 13 AXLE PERIMETER

03 13 AXLE TOWER

04 11 AXLE XL

RELIABLE TRANSPORT LLC | USDOT 3906954 | MC 1441035 | (937) 949-4761




SETUP 01

19 AXLE TOWER

Nelson multi axle setup with a push truck, our longest of the four, for the heaviest transformers. Capacity 300,000 lbs.



THREE QUARTER VIEW

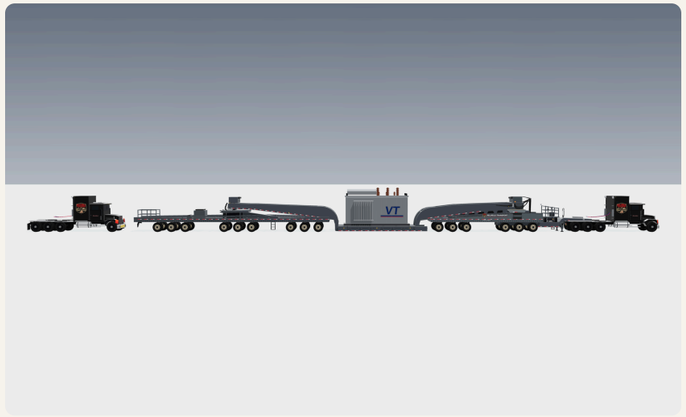

SIDE VIEW




SECOND THREE QUARTER VIEW

19 AXLE TOWER

19 Axle Tower with push truck

Capacity: 300,000 lbs
Overall length: 228'-10 1/2"
Trailer length: 158'-7"
Deck length: 28'-0"
Ride / deck height: 25"
Total height: 16'-0"
VT Transformer: 24'-0" L x 13'-11" H

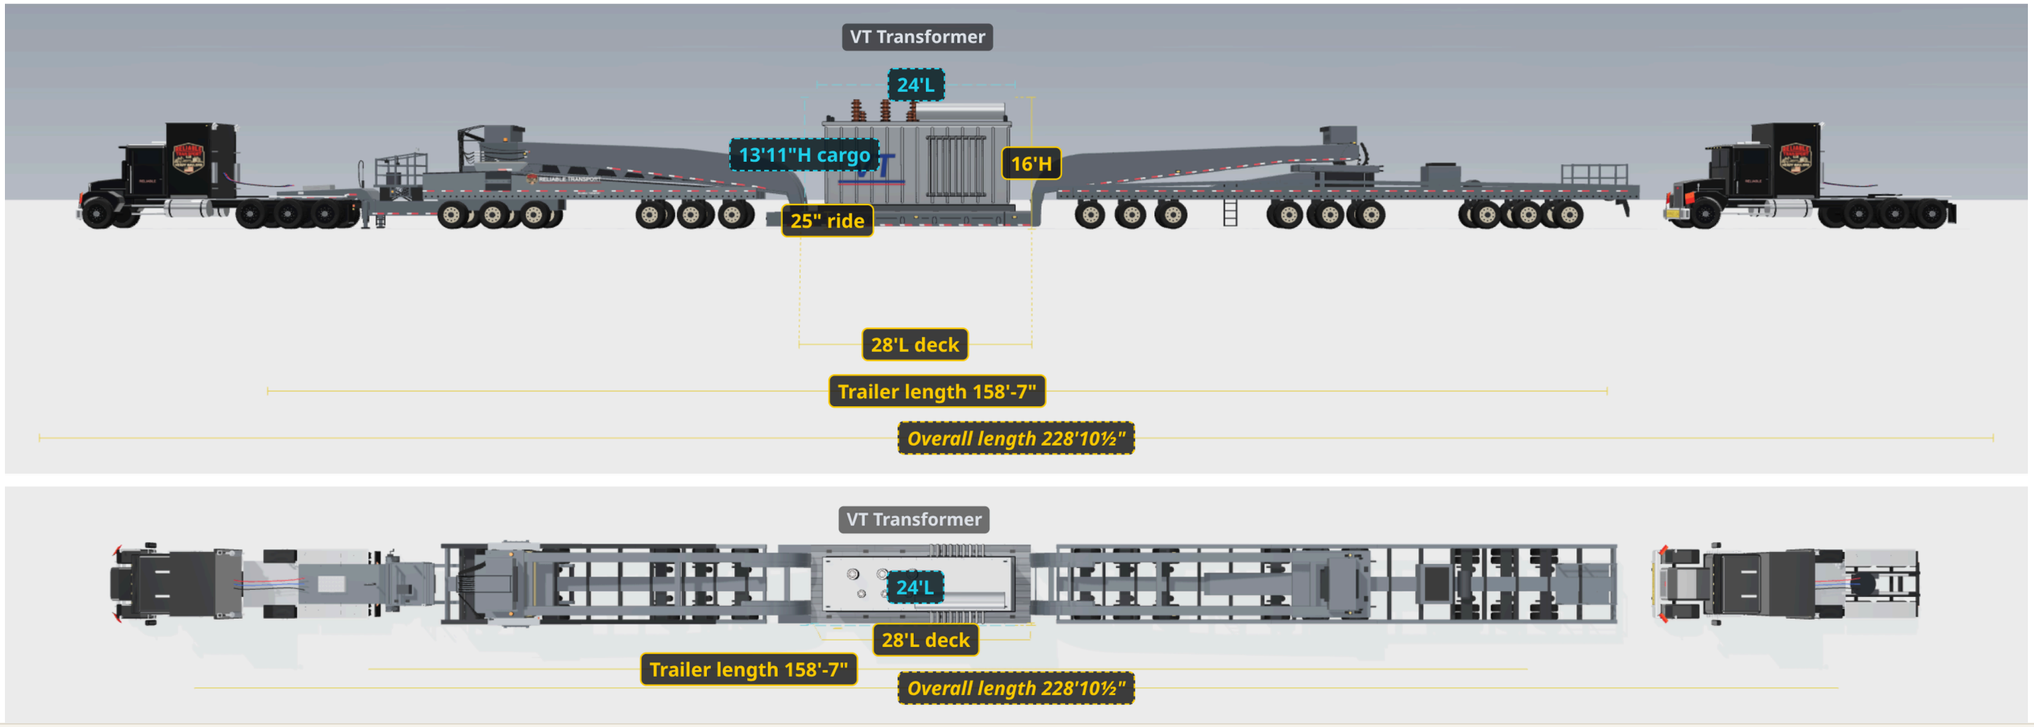


SETUP 02

13 AXLE PERIMETER

XL 180 perimeter trailer that carries a tall transformer low between the beams. Capacity 180,000 lbs.



THREE QUARTER VIEW

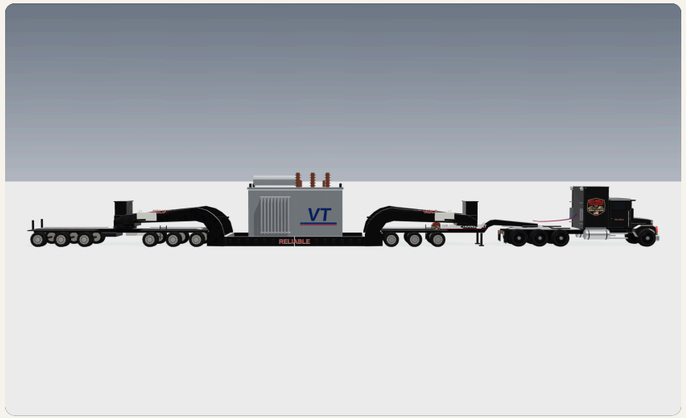

SIDE VIEW




SECOND THREE QUARTER VIEW

13 AXLE PERIMETER

13 Axle Perimeter: XL 180 DGE

Capacity: 180,000 lbs
Deck length: 30'-0"
Ride / deck height: 8"
Total height: 16'-0"
VT Transformer: 21'-8" L x 15'-4" H

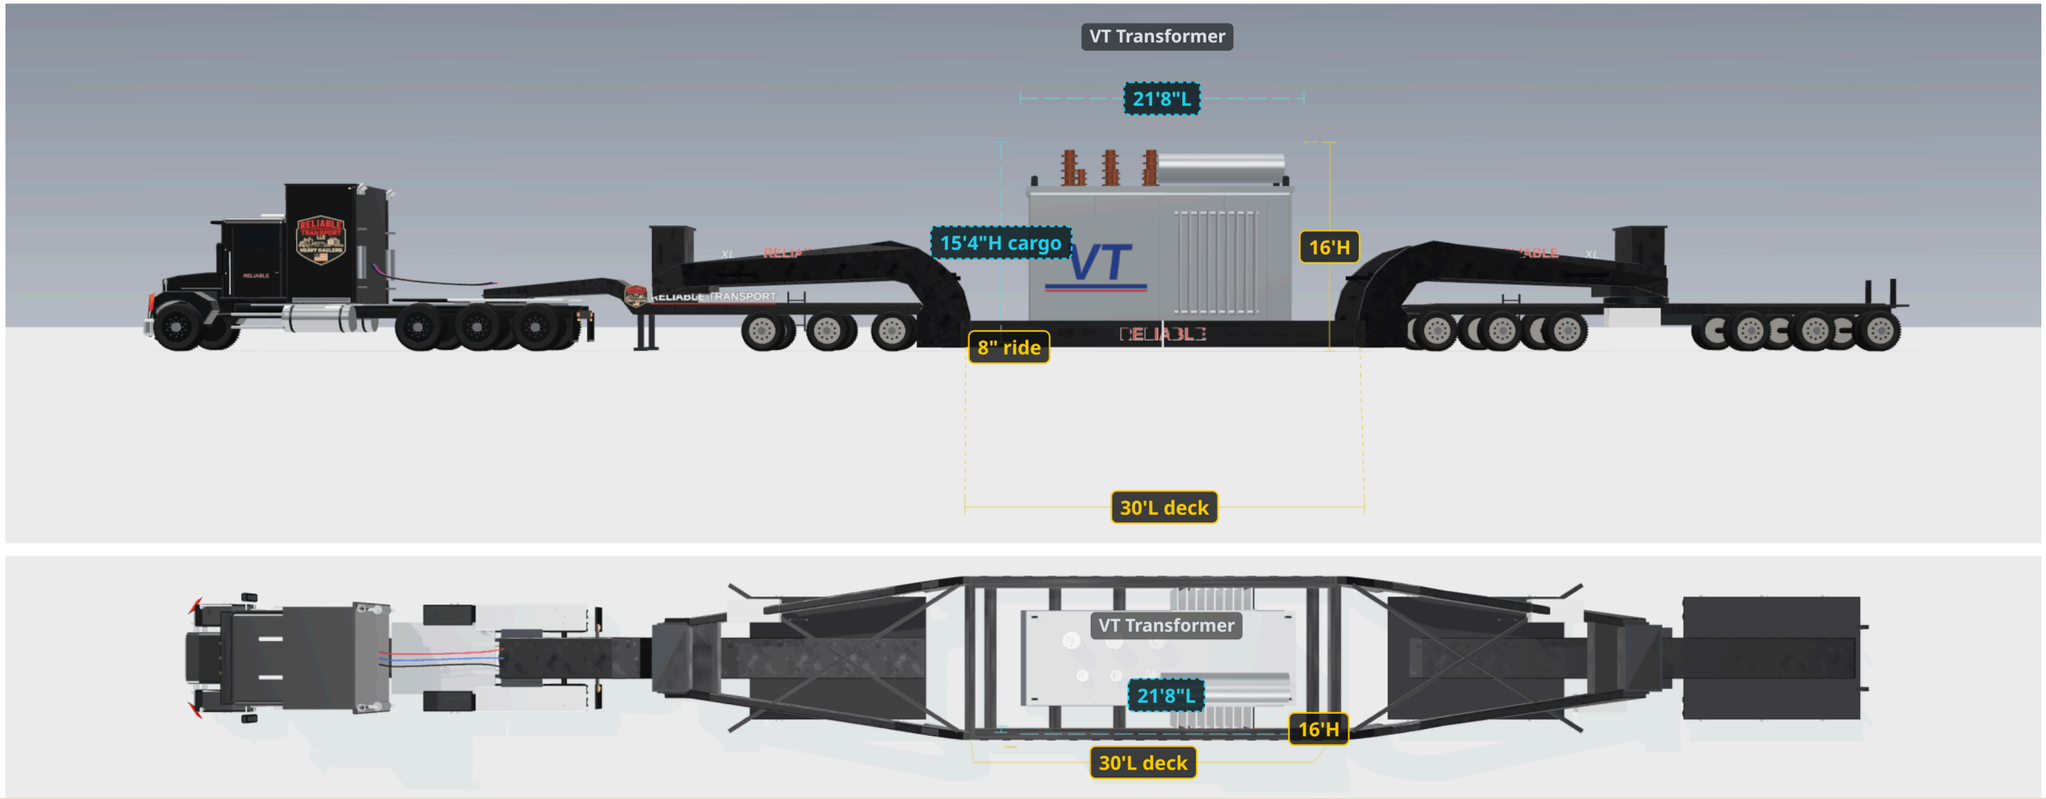

SETUP 03

13 AXLE TOWER

Trail King TK170MDG well trailer that carries the transformer low in the well. Capacity 170,000 lbs.



THREE QUARTER VIEW



SIDE VIEW




SECOND THREE QUARTER VIEW

13 AXLE TOWER

13 Axle Tower: Trail King TK170MDG

Capacity: 170,000 lbs
Deck length: 30'-0"
Ride / deck height: 24"
Total height: 16'-0"
VT Transformer: 24'-0" L x 14'-0" H

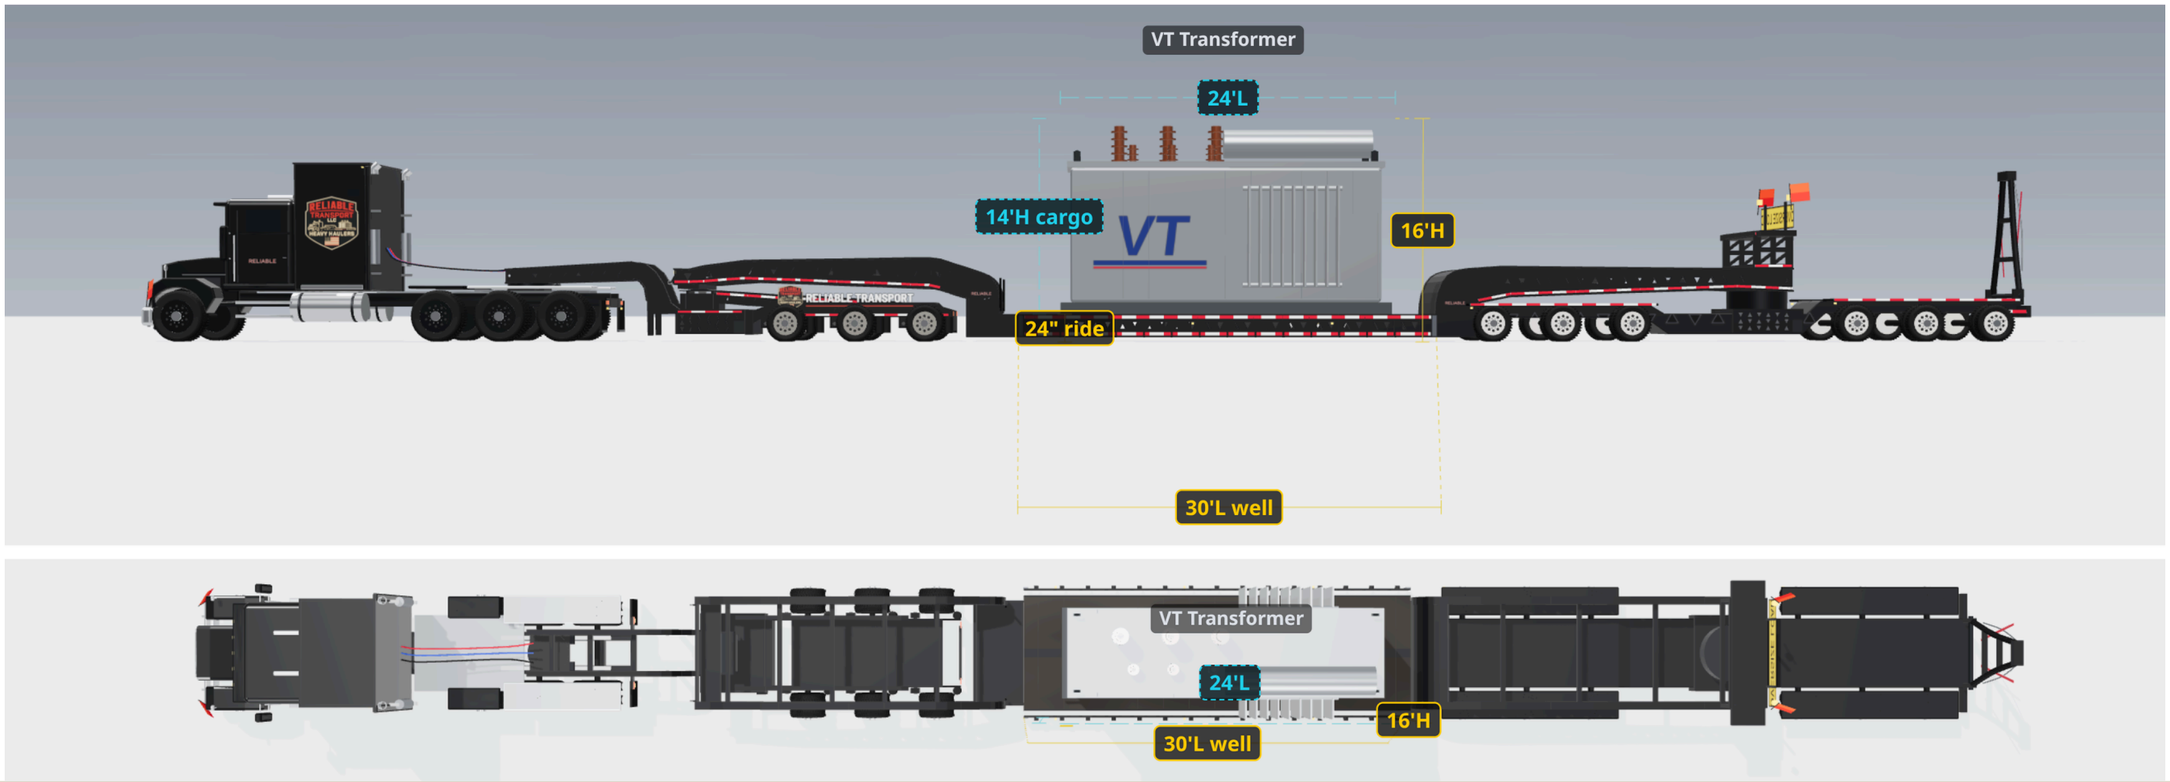


SETUP 04

11 AXLE XL

XL 130 HDEM steerable trailer for tighter turns into plants and substations. Capacity 130,000 lbs.



THREE QUARTER VIEW

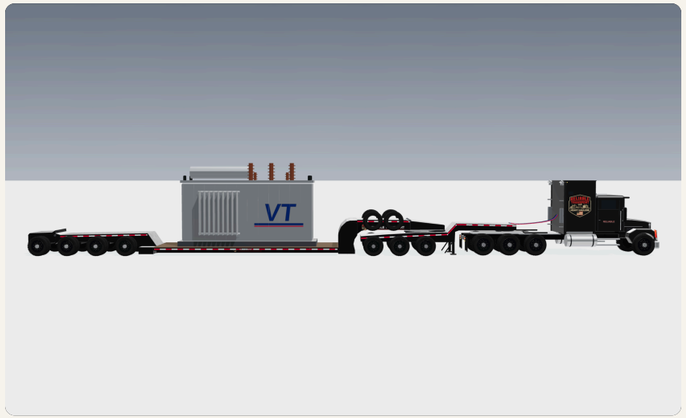

SIDE VIEW




SECOND THREE QUARTER VIEW

SETUP 04 | SPEC DRAWING

11 AXLE XL


Trailer 315 Steerable: XL 130 HDEM, 11 axles

PLAN VIEW

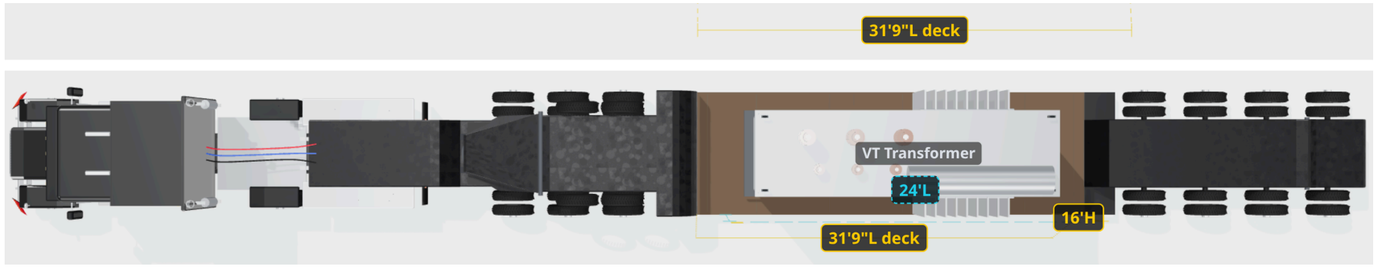

SIDE ELEVATION

Capacity: 130,000 lbs
Deck length: 31'-9"
Ride / deck height: 18"
Total height: 16'-0"
VT Transformer: 24'-0" L x 14'-6" H

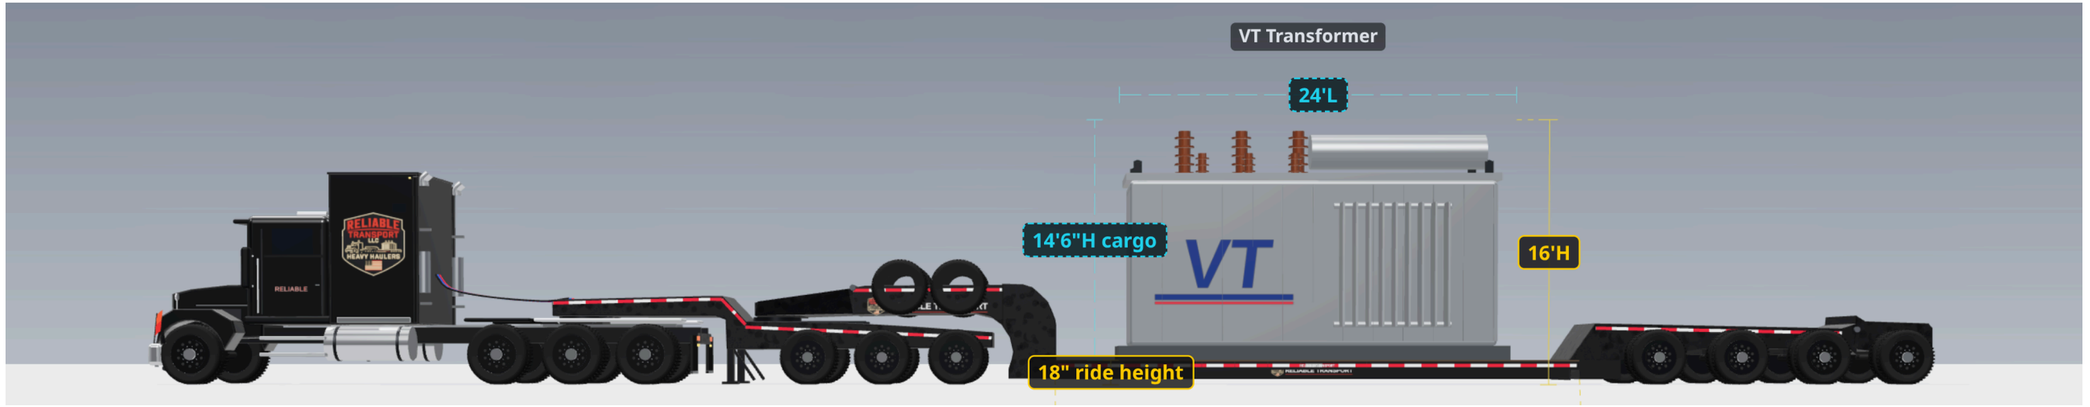

READY TO PLAN YOUR TRANSFORMER MOVE

WHERE HEAVY HAUL MEETS RELIABLE

Luke Akhmedov, Chief Operations Officer | Direct **(937) 684-8392** | Luke@reliabletransportoh.com

Office and dispatch **(937) 949-4761** | dispatch@reliabletransportoh.com | reliableheavyhaul.com

7660 W THIRD ST, DAYTON, OHIO 45417 | USDOT 3906954 | MC 1441035